


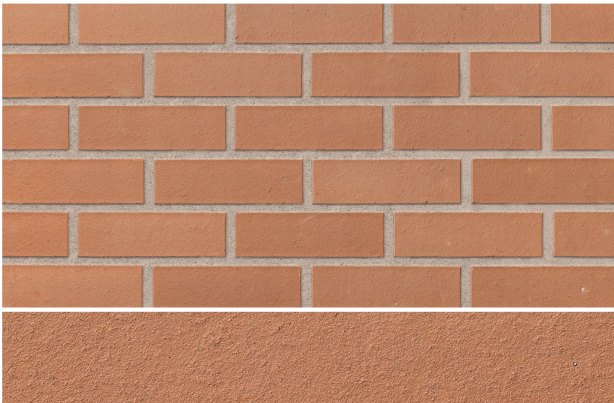

Product Information

Ibstock Code	A0300A
Type	Wirecut
Facing Description	Smooth
Dry Brick Weight	2.0kg
Pack Quantity	552
Packaging (standard)	Banded (plastic)
Factory	Atlas
EPD	-

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm)	215x102x65
Size Tolerances Mean & Range	T2 R1
Configuration	Verically perforated
Voids (%)	33-38%
Compressive Strength (N/mm²)	25 N/mm2
Active Soluble Salts	S2
Water Absorption (% weight)	12%
Durability	F2
Gross Dry Density (kg/m³)	1660
Equivalent Thermal Conductivity "K" value 5% Exposed	1.16
Initial Rate of Absorption (Suction Rate) (kg/m²/min)	0.3
EAN	5036335033388