


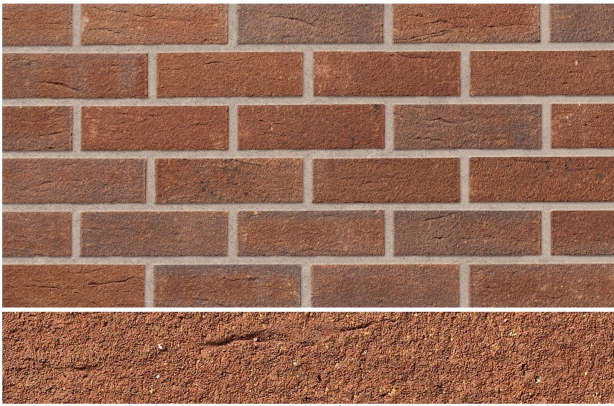

## Product Information

|                      |                                       |
|----------------------|---------------------------------------|
| Ibstock Code         | A0635A                                |
| Type                 | Wirecut Extruded                      |
| Facing Description   | Rolled                                |
| Dry Brick Weight     | 2.4kg                                 |
| Pack Quantity        | 500                                   |
| Packaging (standard) | Banded (Plastic)                      |
| Factory              | Cattybrook                            |
| EPD                  | Cattybrook Product Group 1 (HUB-1659) |

## Technical Specification (to BS EN 771-1)

|                                                       |                       |
|-------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm)                       | 215x102x65            |
| Size Tolerances Mean & Range                          | T2 R1                 |
| Configuration                                         | Vertically Perforated |
| Voids (%)                                             | 25-30%                |
| Compressive Strength (N/mm²)                          | 50                    |
| Active Soluble Salts                                  | S2                    |
| Water Absorption (% weight)                           | 10                    |
| Durability                                            | F2                    |
| Gross Dry Density (kg/m³)                             | 1560                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed  | 1.12                  |
| Initial Rate of Absorption (Suction Rate) (kg/m²/min) | 0.4                   |
| EAN                                                   | 5036335008379         |