


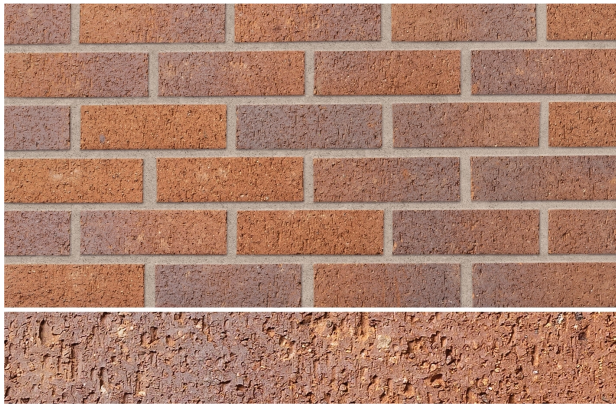

Product Information

Ibstock Code	A0662A
Type	Wirecut Extruded
Facing Description	Dragfaced
Dry Brick Weight	2.4kg
Pack Quantity	500
Packaging (standard)	Banded (Plastic)
Factory	Cattybrook
EPD	Cattybrook Product Group 1 (HUB-1659)

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm)	215x102x65
Size Tolerances Mean & Range	T2 R1
Configuration	Vertically Perforated
Voids (%)	25-30%
Compressive Strength (N/mm²)	50
Active Soluble Salts	S2
Water Absorption (% weight)	10
Durability	F2
Gross Dry Density (kg/m³)	1560
Equivalent Thermal Conductivity "K" value 5% Exposed	1.12
Initial Rate of Absorption (Suction Rate) (kg/m²/min)	0.4
EAN	5036335039885