


Staffordshire Slate Blue Smooth

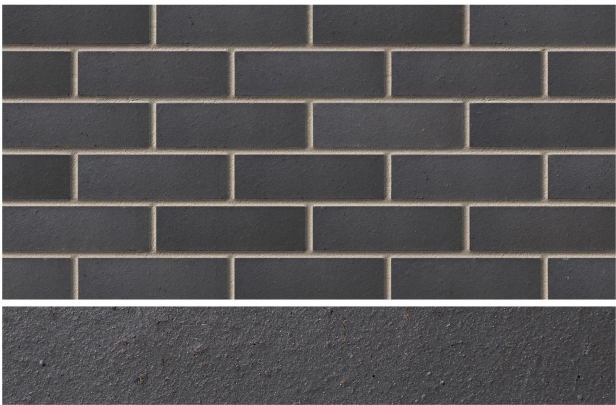

Product Information

Ibstock Code	A2232A
Type	Wirecut Extruded
Facing Description	Smooth
Dry Brick Weight	2.4kg
Pack Quantity	380
Packaging (standard)	Banded (Plastic)
Factory	Lodge Lane
EPD	Lodge Lane Product Group 1&3 (HUB-1066)

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm)	215x102x65
Size Tolerances Mean & Range	T2 R1
Configuration	Vertically Perforated
Voids (%)	23-28%
Compressive Strength (N/mm ²)	75
Active Soluble Salts	S2
Water Absorption (% weight)	7
Durability	F2~
Gross Dry Density (kg/m ³)	1650
Equivalent Thermal Conductivity "K" value 5% Exposed	1.19
Initial Rate of Absorption (Suction Rate) (kg/m ² /min)	0.1
EAN	5036335012932