


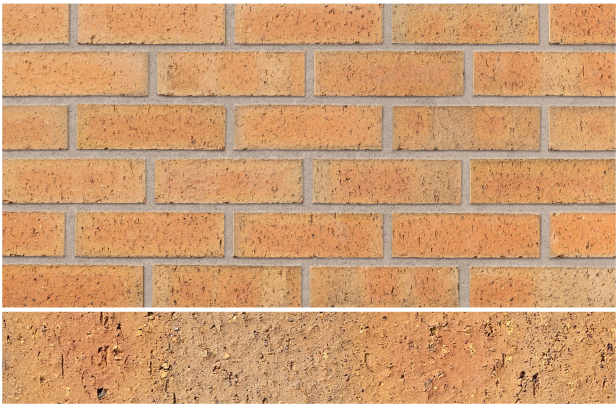

## Product Information

|                      |                                         |
|----------------------|-----------------------------------------|
| Ibstock Code         | A2905A                                  |
| Type                 | Wirecut Extruded                        |
| Facing Description   | Dragfaced                               |
| Dry Brick Weight     | 2.3kg                                   |
| Pack Quantity        | 500                                     |
| Packaging (standard) | Banded (Plastic)                        |
| Factory              | Chesterton                              |
| EPD                  | Chesterton Product Group 1&3 (HUB-0823) |

## Technical Specification (to BS EN 771-1)

|                                                       |                       |
|-------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm)                       | 215x102x65            |
| Size Tolerances Mean & Range                          | T2 R1                 |
| Configuration                                         | Vertically Perforated |
| Voids (%)                                             | 33-38                 |
| Compressive Strength (N/mm²)                          | 55                    |
| Active Soluble Salts                                  | S2                    |
| Water Absorption (% weight)                           | 7                     |
| Durability                                            | F2~                   |
| Gross Dry Density (kg/m³)                             | 1440                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed  | 1.16                  |
| Initial Rate of Absorption (Suction Rate) (kg/m²/min) | 0.4                   |
| EAN                                                   | 5036335017012         |