


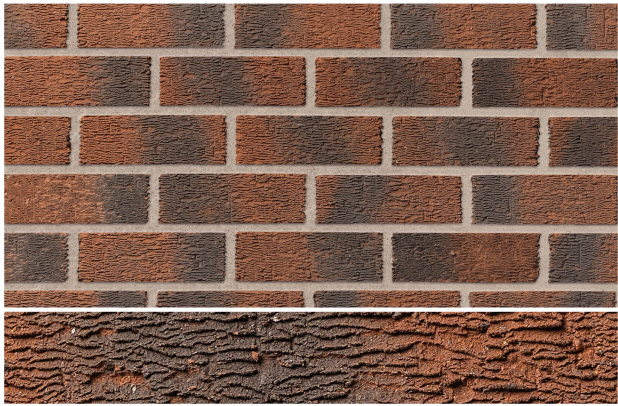

## Product Information

|                      |                  |
|----------------------|------------------|
| Ibstock Code         | C0356A           |
| Type                 | Wirecut Extruded |
| Facing Description   | Rusticated       |
| Dry Brick Weight     | 2.5kg            |
| Pack Quantity        | 332              |
| Packaging (standard) | Banded (Plastic) |
| Factory              | Aldridge         |
| EPD                  | -                |

## Technical Specification (to BS EN 771-1)

|                                                       |                       |
|-------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm)                       | 215x102x73            |
| Size Tolerances Mean & Range                          | T2 R1                 |
| Configuration                                         | Vertically Perforated |
| Voids (%)                                             | 27-32%                |
| Compressive Strength (N/mm²)                          | 25                    |
| Active Soluble Salts                                  | S2                    |
| Water Absorption (% weight)                           | 12                    |
| Durability                                            | F2                    |
| Gross Dry Density (kg/m³)                             | 1470                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed  | 1.09                  |
| Initial Rate of Absorption (Suction Rate) (kg/m²/min) | 0.7                   |
| EAN                                                   | 5036335043288         |