

Cavity Wall

Available for cavity widths from 50mm to 165mm

OUTER LEAF

102mm

INNER LEAF

100mm



L5


To achieve loading figures lintel must be built in with blockwork as shown. Ensure all perpendicular and horizontal joints are filled with mortar. Place mortar bed on top of blockwork before floor units are laid to provide even distribution of load. Lintels may be propped to facilitate speed of construction.

Extra Heavy Duty Load

L5/100 For cavity widths 90-105mm

Manufactured length 150mm increments	600- 1500	1650- 2100	2250- 3000	3150- 4000	4200- 4800
Height 'h'	234	234	234	234	234
Thickness	2.9	2.9	2.9	3.2	3.2
Total UDL kN 19:1	70	60	50	45	40


90-105mm cavity

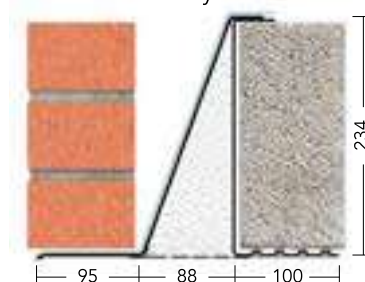

L5/110 For cavity widths 110-125mm

Manufactured length 150mm increments	600- 1500	1650- 2100	2250- 3000	3150- 4000	4200- 4800
Height 'h'	234	234	234	234	234
Thickness	2.9	2.9	2.9	3.2	3.2
Total UDL kN 19:1	70	60	50	45	40

110-125mm cavity

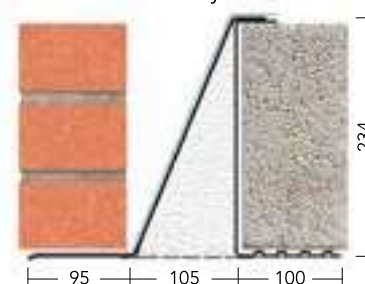

L5/150 For cavity widths 150-165mm

Manufactured length 150mm increments	600- 1500	1650- 2100	2250- 3000	3150- 4000	4200- 4800
Height 'h'	234	234	234	234	234
Thickness	2.9	2.9	2.9	3.2	3.2
Total UDL kN 19:1	70	60	50	45	40

150-165mm cavity

