

Solid Wall Lintels

**100 -215mm
WALL WIDTH**



Standard Load


INT 100

Overall Length (mm)	900	1050	1100	1200
Maximum Span	700	850	900	1000
Total UDL kN	7	7	7	7

When using INT 100 normal building practice should be observed in that one course and the mortar allowed to cure for at least 24 hours before additional loads are applied. Not suitable for floor loads.



Specify INT 64 for 75mm solid wall.




L9/SW 100

Manufactured length 150mm increments	600- 1200	1350- 1650	1800- 2100	2250- 2700
Height 'h'	58	88	89	116
Thickness	2.5	2.5	2.9	3.2
Total UDL kN	6	8	8	10

To achieve loading figures lintel must be built in as shown, blockwork must be tracked to accommodate upstand of lintel.



Suitable for 100 - 150mm solid walls.

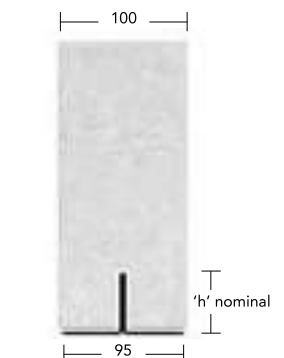

L9

Manufactured length 150mm increments	600- 1200	1350- 1650	1800- 2100	2250- 2700
Height 'h'	58	93	94	117
Thickness	2.5	2.5	2.9	3.0
Total UDL kN	6	8	8	10



Suitable for 215mm solid walls.

